

transdubec, s.a.

células de carga – load cells – weighing electronics




- Shear beam load cell
- 3000 divisions OIML R60 class C
- Hermetically sealed laser welded
- Measurement element from alloy steel
- Protected against humidity IP68 (EN60529)

TCC-3


2000-3000-5000 Kg

Technical data

Accuracy class	C3
Nominal Sensitivity	2mV/V ± 0.1%
Vmin	8000
Maximum combined error	0.02% N.L
Range of excitation	5..15V
Input resistance	386 ± 5 Ω
Output resistance	350 ± 5 Ω
Temperature limits OIML R60	-10..40°C
Insulation resistance	>5000MΩ
Cable length	9m

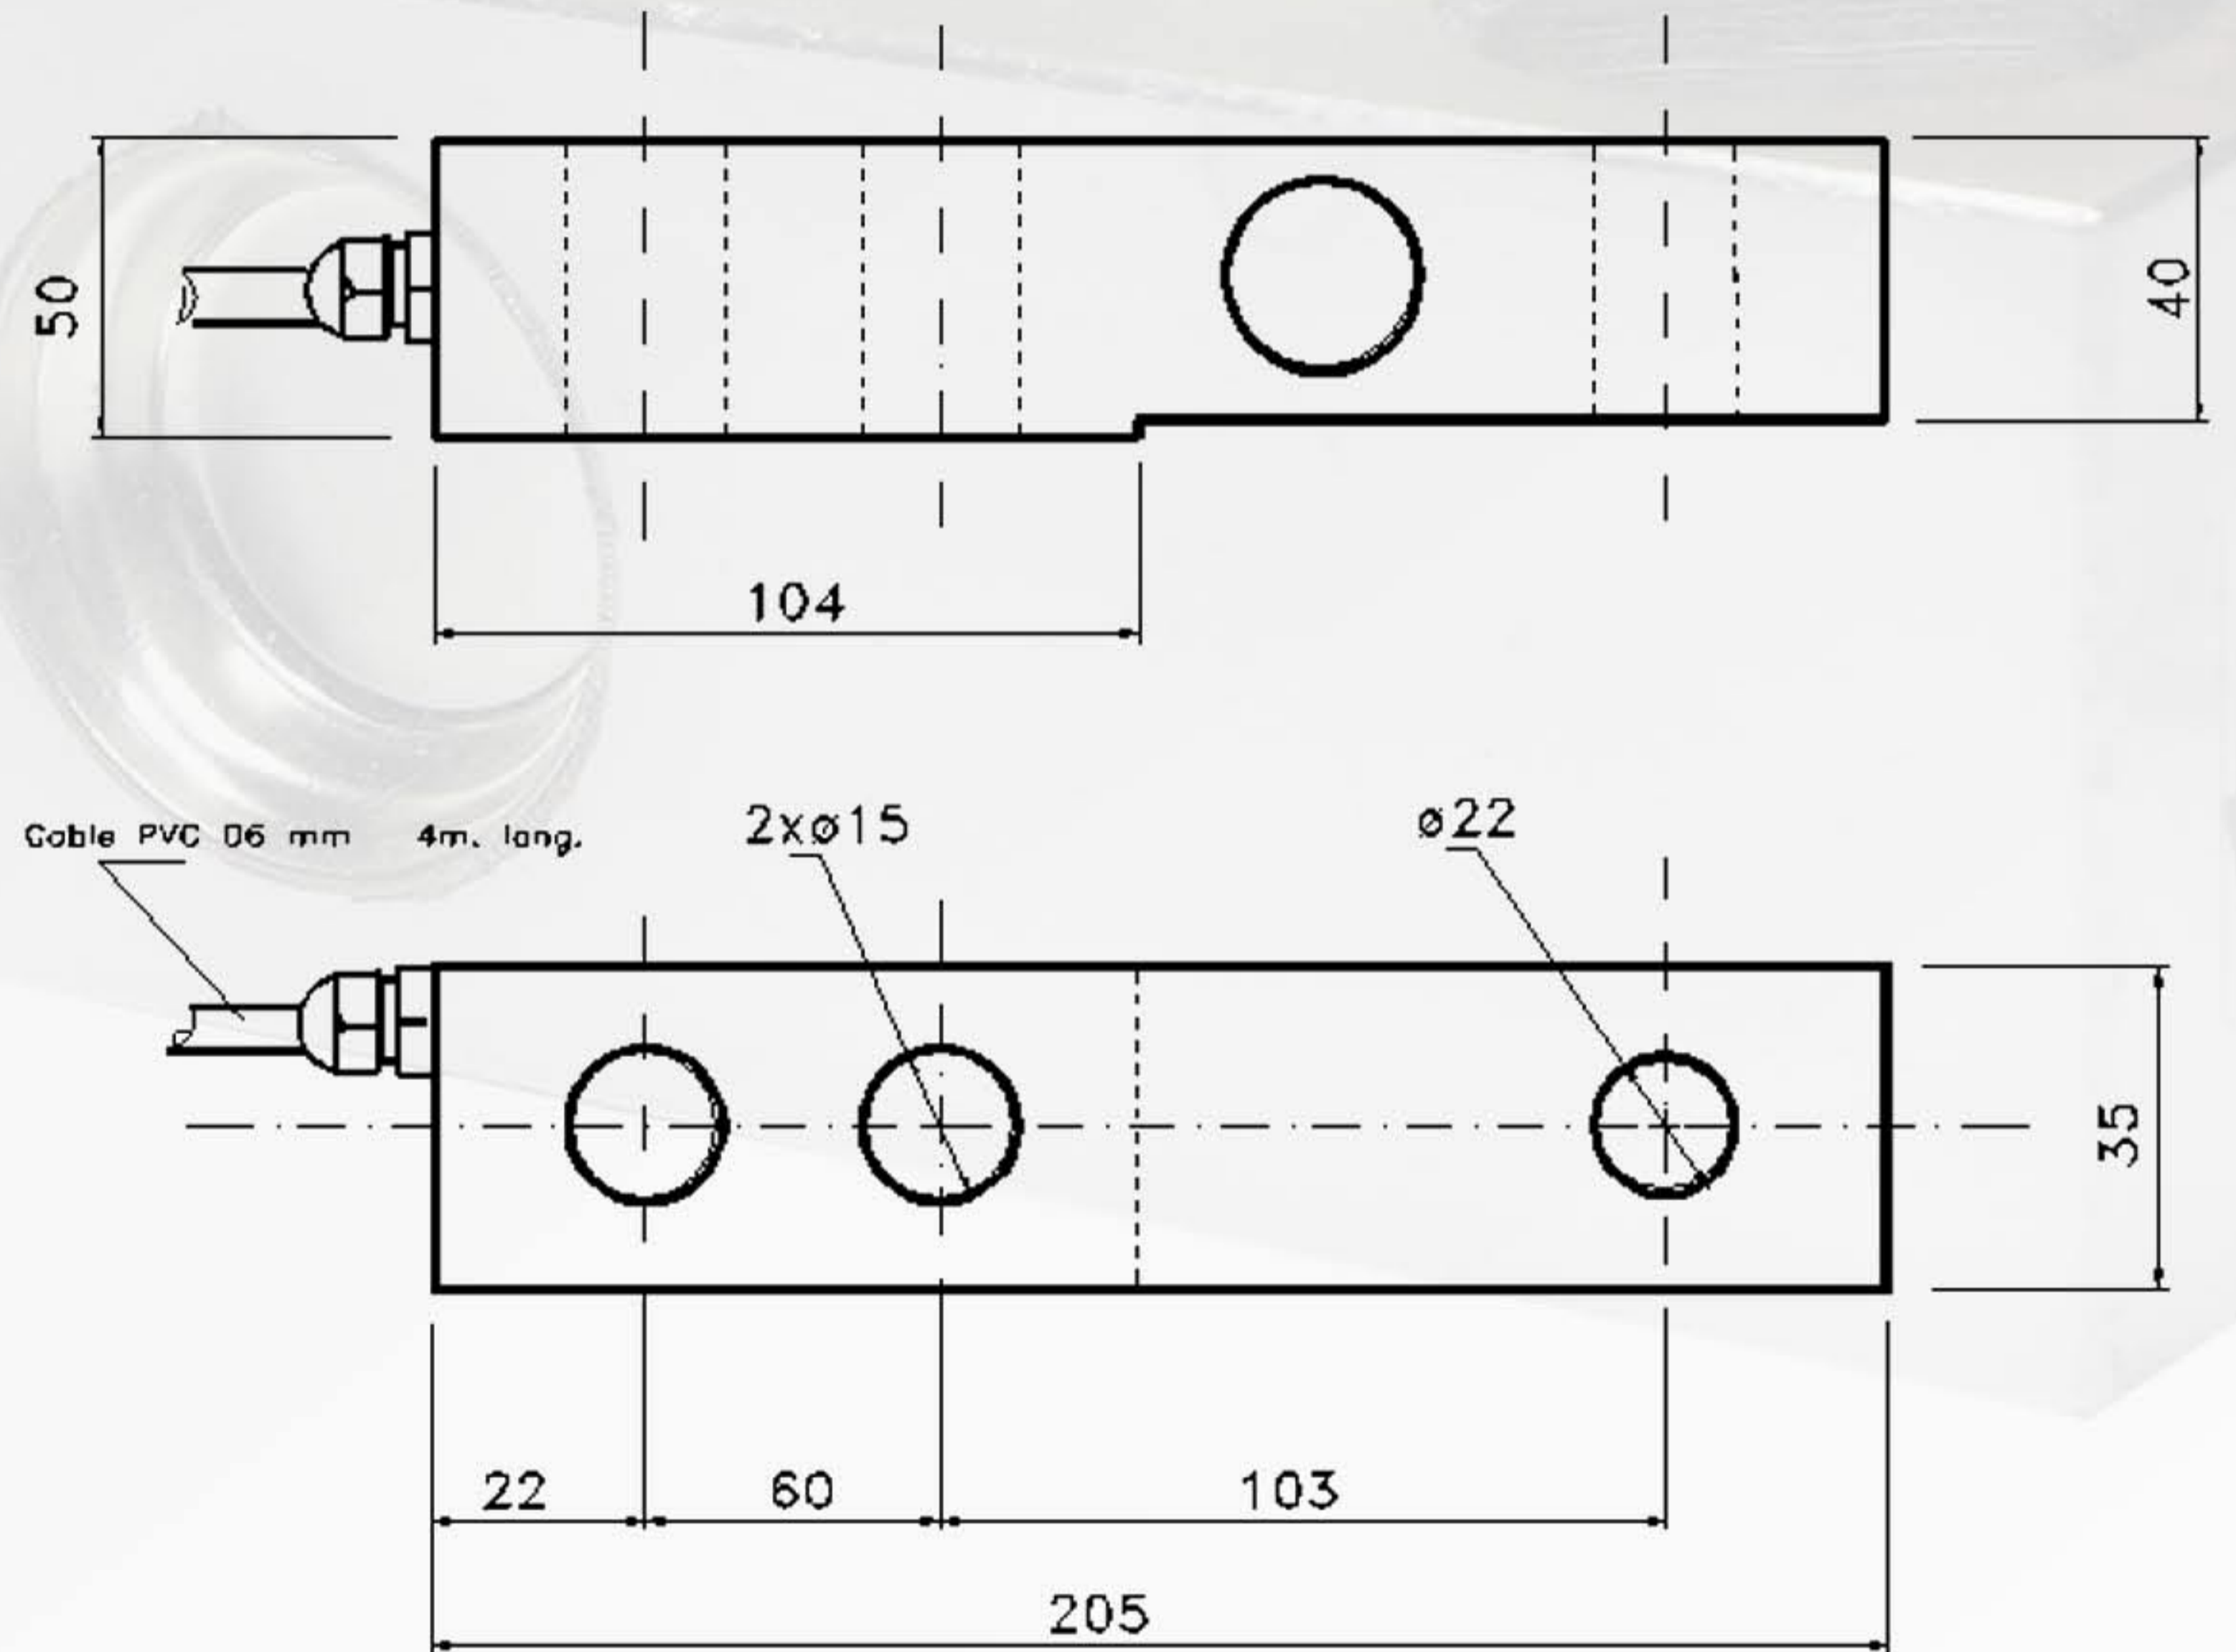

Electrical connection

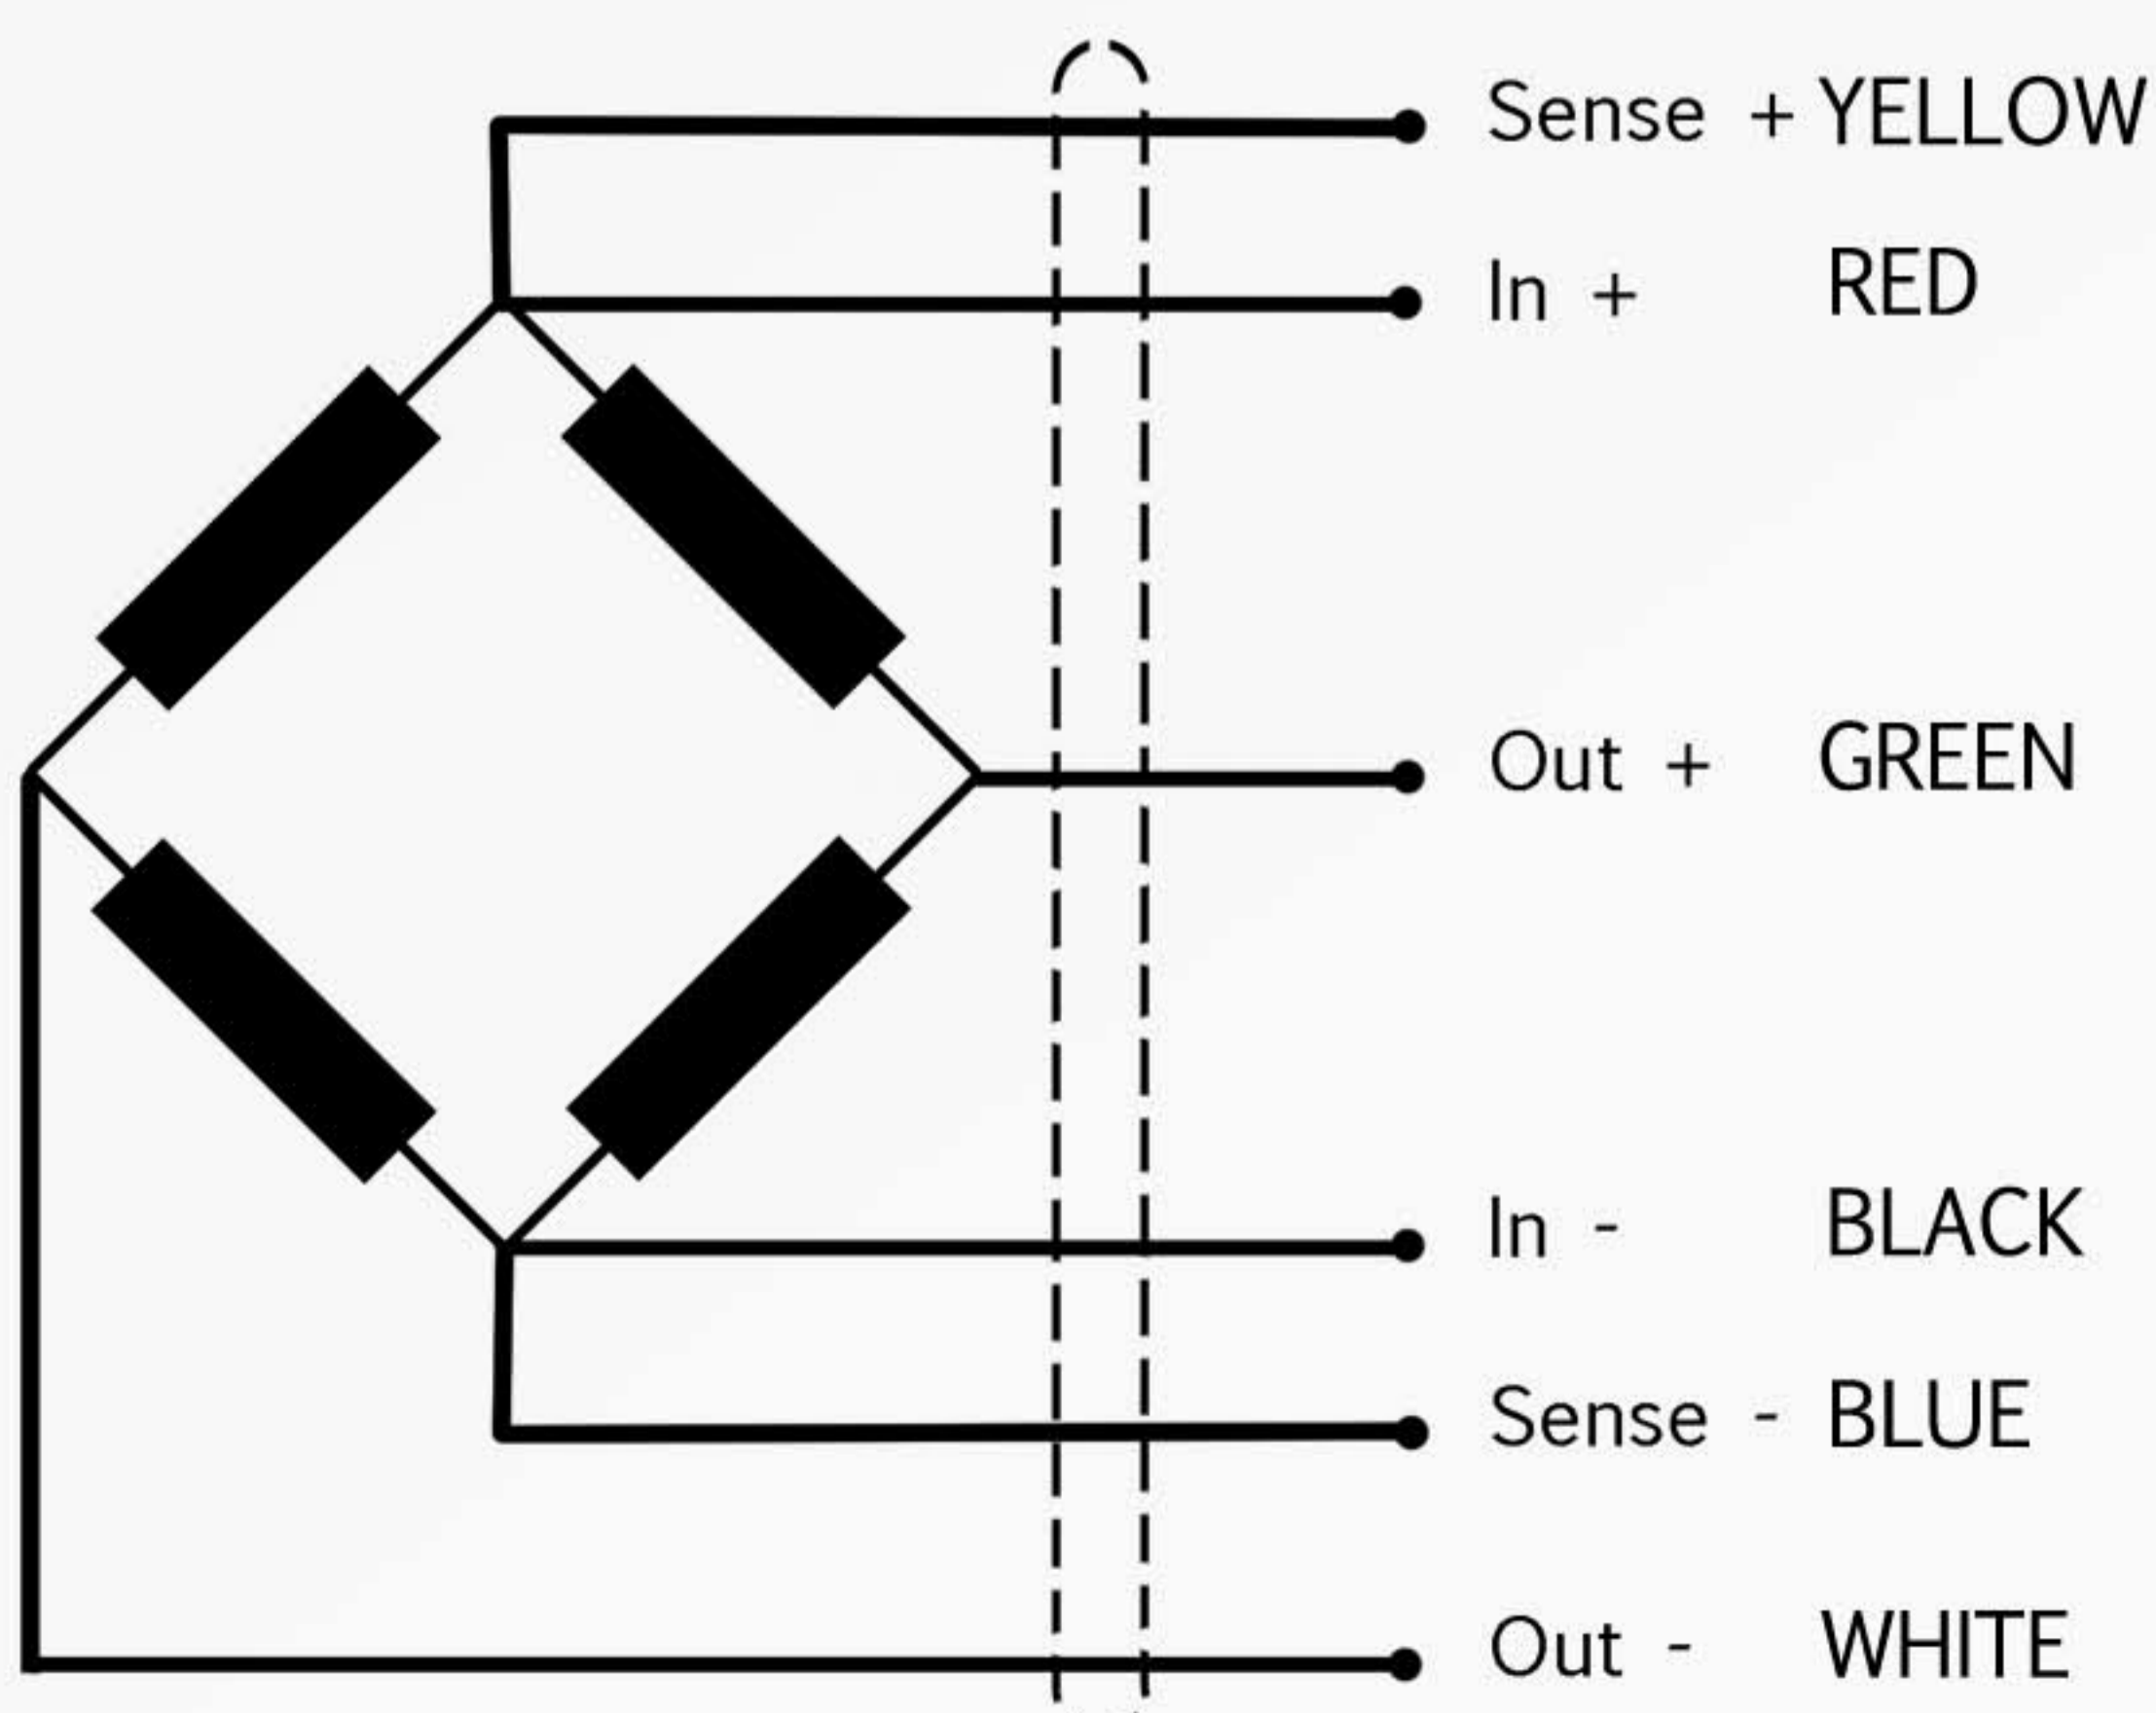

<http://www.transdubec.com>
transdubec@transdubec.com
 T. +34 93 3810004 - F. +34 93 4620599
 cl. Joan Miró, 11
 08930 Sant Adrià de Besós - Barcelona - SPAIN